

OVERVIEW: S100 EXTREME SYSTEM

With the ability to achieve up to 7.8m (25.59') widths, the S100 Extreme System consists of robust hardware providing a solution for significantly heavier shading systems. The perfect solution for both internal and external applications, domestic or commercial, the S100 Extreme System creates a new opportunity to achieve greater, grander beautiful shades.

AESTHETIC FEATURES


- Powder coated robust die cast brackets.

ASSEMBLY / INSTALLATION BENEFITS

- Zamack adaptor (for star head motor only) with fixing screws to ensure a secure motor attachment for large shades.
- Round heavy duty weight bar with floating end cap for self-adjusting alignment
- Easy Wire guide tensioning at base of shade for adjustment and maintenance.
- Optional tension spring provides virtually maintenance free wire guide tension, automatically adjusting to cable stretch and contraction.
- Adjustable bearing idler
- Choice of three rigid design aluminum tube sizes; 110mm (4.33"), 130mm (5.12") & 160mm (6.30") with simple spline and component attachment.

FUNCTIONAL BENEFITS

- Motorized or gear control options
- Ceiling, Outside and Inside Mount applications.
- Heavy duty tubes & weight bar to achieve wider spans.
- Secure Stainless Steel Wire Guide System.

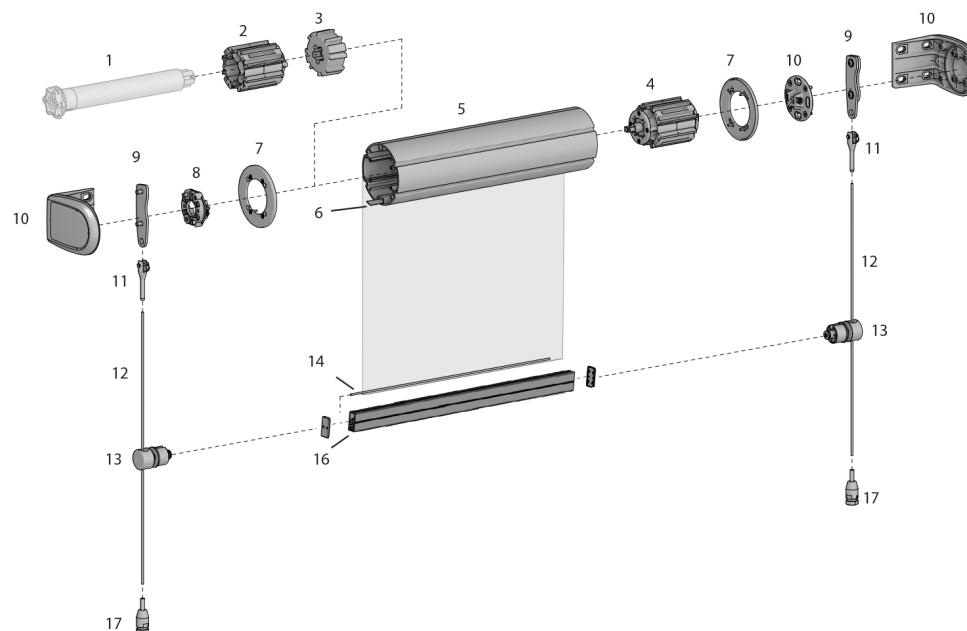

SYSTEM OPTIONS

INSIDE MOUNT BRACKETS



WALL MOUNT BRACKET



GEAR CONTROL




SYSTEM INDEX

1	M50 Motor - SOMFY ZAMACK *
2	Extreme Universal Crown Wheel RB80-0701-073100
3	Extreme Drive Wheel RB80-0301-073100
4	Extreme Bearing Idler RB80-0201-073100
5	S100 Aluminum Tube [STD, HD & XHD] RB93-01#0-0966#0
6	15mm (0.59") Flat Spline [OR 6mm (0.24") round spline*] RB92-1501-001100
7	Extreme Tube End Plate [STD, HD & XHD] RB80-0601-0731#0
8	SOMFY Zamack Adaptor RB56-0762-014050
9	Extreme Wire Guide Adapter - Ceiling Mount RB80-0471-xxx100
10	Extreme Bracket Set - Ceiling, Outside Mount RB80-1201-xxx109
11	Fork Swage Terminal RE24-1314-009400
12	Stainless Steel Wire - 4mm RB91-3602-006040
13	Extreme FD42 Wire Guide End Cap RB91-1340-xxx003
14	3.5mm (0.14") Round Spline *
16	F56 hembar
17	Tension Bracket & Flat Head Stud Terminal

xxx= color ## = size

* Non Rollease Acmeda Item


COLOR RANGE

off white
066black
050
**ROLLEASE
ACMEDA**


SPECIFICATIONS: S100 EXTREME S100 SYSTEM

BRACKET DIMENSIONS

Ceiling / Outside Mount Brackets

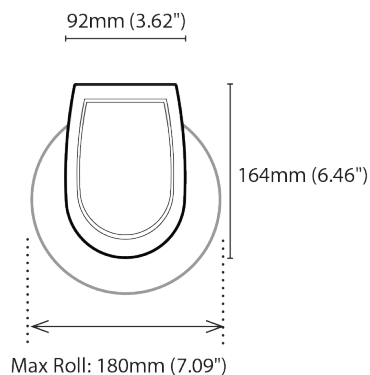


Inside Mount Brackets

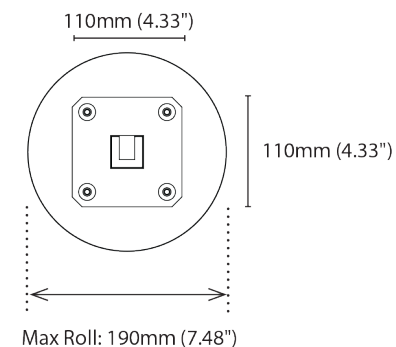


MOUNTING OPTIONS


OUTSIDE MOUNT



CEILING MOUNT




INSIDE MOUNT



DEDUCTIONS*

Ceiling/Outside Mount Motorized Example Shown

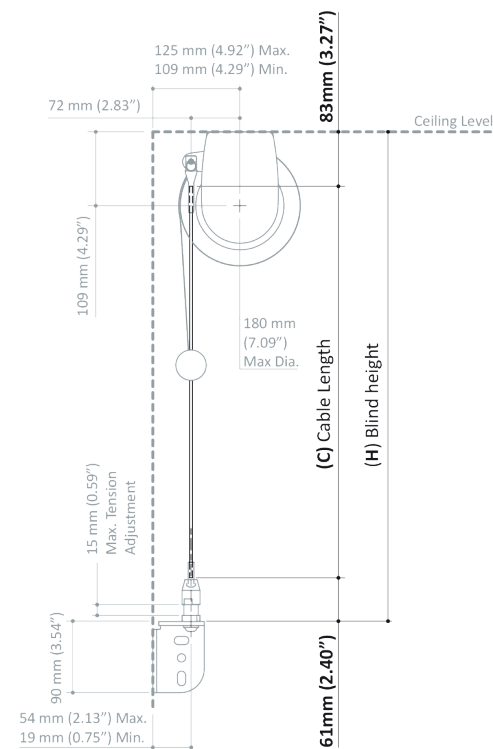

RECOMMENDED MAXIMUM WIDTH - MOTORIZED SYSTEM *


TUBE	MAX WIDTH	MAX DROP
S100 110mm (4.33")	5.6 metres (18.37')	10 metres (32.8')
S100 130mm (5.12")	6.6 metres (21.65')	10 metres (32.8')
S100 160mm (6.30")	7.8 metres (25.59')	10 metres (32.8')

RECOMMENDED MAXIMUM WIDTH - GEAR SYSTEM *

TUBE	MAX WIDTH	MAX DROP
S100 110mm (4.33")	5.6 metres (18.37')	4 metres (13.12')
S100 130mm (5.12")	6.6 metres (21.65')	4 metres (13.12')

* Refer to Product Specifications Manual for further details.

CAPACITY CHART / ALUMINUM TUBES

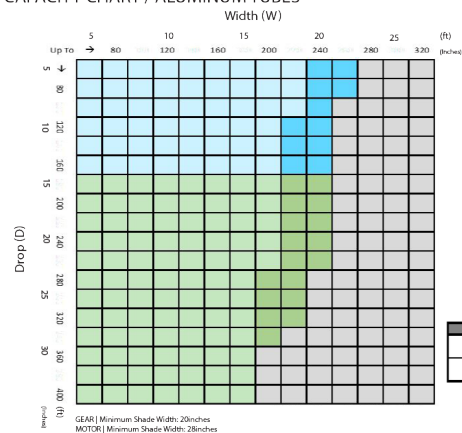

CONTROL	TUBE
GEAR / MOTOR	110mm / 110STD
MOTOR	130mm / 130STD
	160mm / 160STD
	OUTSIDE OPERATIONS

S100 | 110 STANDARD

CODE: RB93-0110-096600
O.D.: 110mm (4.33")
Length: 6metres (19.69')



S100 | 130 HEAVY DUTY

CODE: RB93-0130-096700
O.D.: 130mm (5.12")
Length: 7metres (22.97')



S100 | 160 EXTRA HEAVY DUTY

CODE: RB93-0160-096680
O.D.: 160mm (6.30")
Length: 6.8metres (22.31')

